DATEL ELECTRONICS
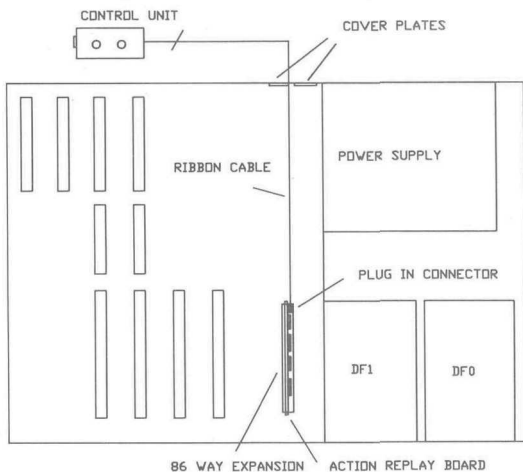
AMIGA 2000 INSTALLATION

The following text is for owners of the Amiga 2000 and is intended to replace the first paragraph of section 1 of the manual.

BEFORE PLUGGING OR UN-PLUGGING ANY DEVICE INTO YOUR AMIGA EXPANSION SLOTS YOU MUST ENSURE THE COMPUTER IS SWITCHED OFF. FAILURE TO OBSERVE THIS PRECAUTION WILL RESULT IN DAMAGE TO YOUR SYSTEM.

Firstly you must remove the case of your Amiga 2000. You will find a large number of expansion slots, the one you need is located towards the middle of the machine and is somewhat smaller than the others, it is an 86 way connector and the Action replay card should fix exactly in the slot with no spare connectors on either side. It should be inserted firmly with the extension lead connector facing towards the rear of the machine as in the diagram. The extension lead will then connect to the Action replay board, it will only fit in one way around, and should be lead out of the machine through an appropriate panel, one on the rear would probably suit best. Now replace the case of the machine. The control box can now be placed at an appropriate position by the side of the computer ready for freezing. To test the board simply power up the machine with the slommo switched off. When the startup screen (the hand with the disk) appears press the red freeze button, if all is well the screen should turn blue and the Action replay sign on menu will appear. If this does not happen switch your machine off and check the Installation again. The manual should now be continued from page 4 starting from the section marked OPERATION.

FRONT OF AMIGA 2000

DATEL ELECTRONICS

Manufacturers •Distributers •Mail Order Specialists ■ Importers of Micro Electronic Components